

Serie | 4, Telescopic cooker hood, 90 cm, Silver metallic DFS097A51B

A



Optional accessories

DSZ4561 : Standard odor filter (replacement)
 DSZ4565 : Standard recirculation kit
 DSZ4920 : Installation kit for 90cm wide wall unit
 DWZ0IT0P0 : Long Life odor filter (replacement)
 DWZ1IT1D1 : Long Life recirculation kit external
 DWZ1IX1B6 : Clean Air Plus odor filter (replacement)
 DWZ1IX1C6 : Clean Air Plus recirc. kit external

Telescopic cooker hoods extend when in use and slide neatly away when not in operation.

- **Extra silent:** the high-performance hood, with minimal noise.
- **Grease filtration level:** filters out over 85% of the grease from kitchen air.
- **EcoSilence Drive™:** the powerful, energy-saving drive for hoods.
- **LED Illumination:** The energy-saving lighting provides bright and clear lighting for the hob area.
- **Intensive speed setting:** removes strong kitchen odours quickly and effectively.

Technical Data

Typology : Pull-out
 Approval certificates : CE, E17D UKCA marking, VDE
 Length of electrical supply cord : 175 cm
 Required niche size for installation (HxWxD) : 385mm x 524.0mm x 290mm mm
 Minimum distance above an electric hob : 430 mm
 Minimum distance above a gas hob : 650 mm
 Net weight : 13.077 kg
 Type of control : Electronic
 Maximum output air extraction : 397 m³/h
 Boost position output recirculating : 628 m³/h
 Maximum output recirculating air : 358 m³/h
 Boost position air extraction : 729 m³/h
 Number of lights (Stck) : 3
 Noise level : 53 dB(A) re 1 pW
 Diameter of air outlet : 120 / 150 mm
 Grease filter material : Washable stainless steel
 EAN code : 4242005232109
 Connection rating : 146 W
 Fuse protection : 10 A
 Voltage : 220-240 V
 Frequency : 50; 60 Hz
 Plug type : GB plug
 Installation type : Built-in



4 242005 232109

Serie | 4, Telescopic cooker hood, 90 cm, Silver metallic DFS097A51B

**Telescopic cooker hoods extend when in use
and slide neatly away when not in operation.**

Planning and installation information

- Installation system: Telescopic comfort installat.
- Dimensions (HxWxD): 426 x 898 x 290 mm
- Built-in dimensions (HxWxD): 385 x 524 x 290 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Electrical cable length 1.75 m

** In accordance with the EU-Regulation No 65/2014*

Features

- Electronic control via Soft touch button control
- 3 power levels & intensive setting
- 3 x 1,5W LED
- Efficient BLDC technology
- Automatic intensive revert (6mins)
- Automatic after running (Automatic after running (10 min))
- 3 removable metal grease filter cassettes







Design

- 90 cm wide
- Silver metallic lacquer
- Handle strip specification: stainless steel with logo
- Steel filter cover



Performance

- Suitable for ducted or recirculating operation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 max. 729 m³/h
- Extraction rate according to EN 61591 Ø 15 cm:
max. Normal use 397 m³/h
Intensive 729 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at
max. normal use exhaust air: 53 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13
exhaust air:
Max. normal use: 53 dB(A) re 1 pW
Intensive: 69 dB(A) re 1 pW
- With the Clean Air Plus recirculation kit (available as optional
accessory) your appliances reaches:
Extraction rate in recirculation mode:
Max. normal use: 358 m³/h
Intensive: 628 m³/h
Noise level in recirculation mode:
Max. normal use: 60 dB(A) re 1 pW
Intensive: 71 dB(A) re 1 pW
- Colour Temperature: 3500 K
- Light Intensity: 355 lux
- Power rating: 146 W
- Average Energy Consumption: 38.1 kWh/year*
- Blower Efficiency Class: B*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*

**Serie | 4, Telescopic cooker hood, 90 cm,
Silver metallic
DFS097A51B**

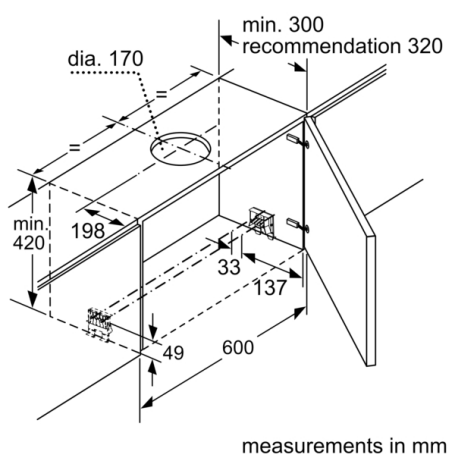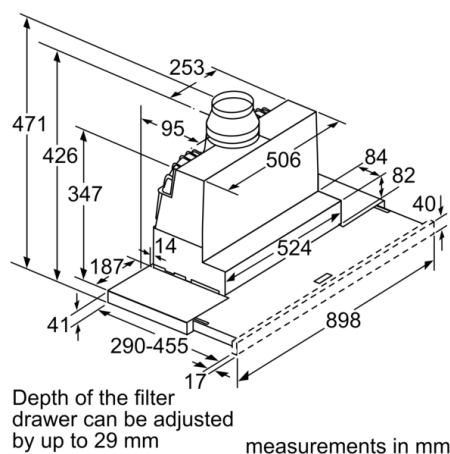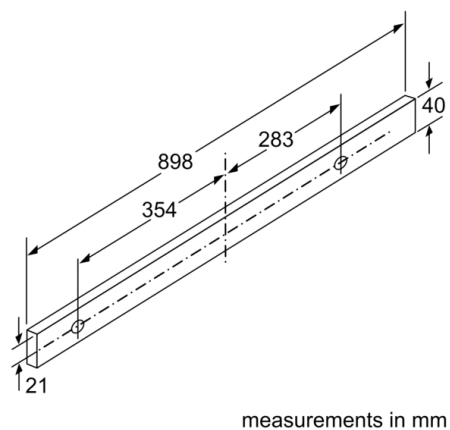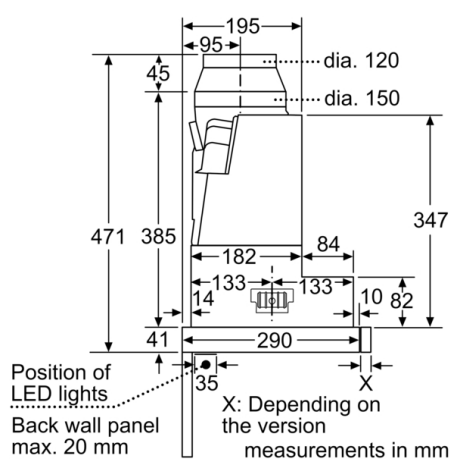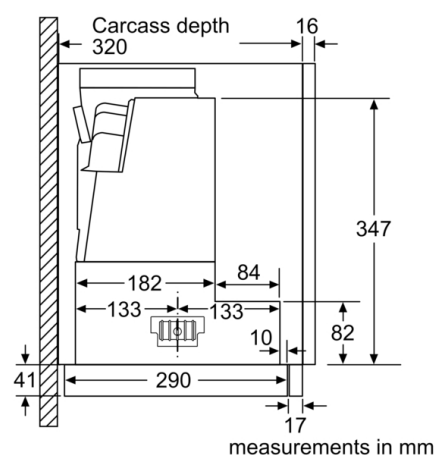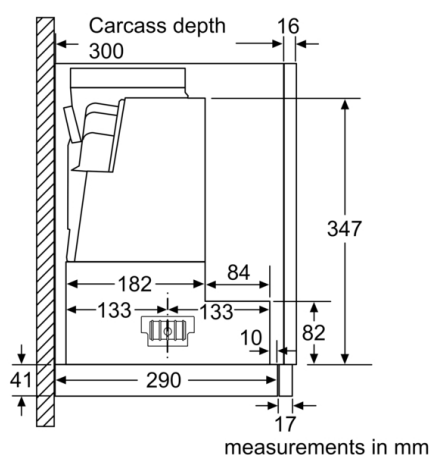

**Serie | 4, Telescopic cooker hood, 90 cm,
Silver metallic
DFS097A51B**

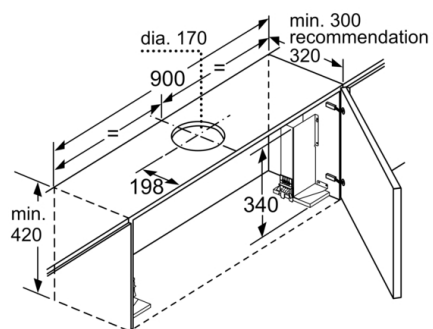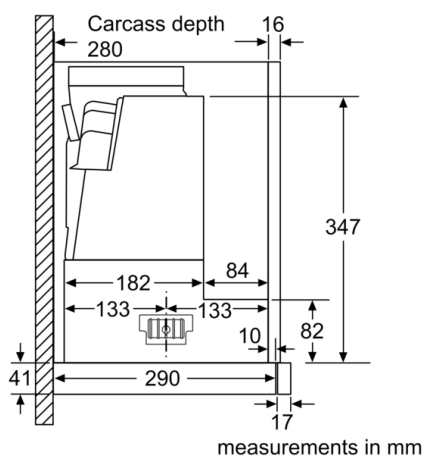

When installing the 90 cm telescopic hood in a 90 cm wide wall-hanging cupboard, a mounting kit is required. The two mounting brackets are screwed onto the left and right of the kitchen unit. Installation in accordance with template.

measurements in mm