

**Serie | 4, Wall-mounted cooker hood,
80 cm, clear glass black printed
DWK87CM60B**



B

**Angled hood: perfect for keeping an eye on
your pots and pans.**

- **Especially silent:** maximum hood performance, minimum noise.
- **Easy-to-clean interior:** hidden screws and cables along with rounded edges make cleaning easy.
- **TouchSelect control:** Quickly select hood settings via touch.
- **LED Illumination:** The energy-saving lighting provides bright and clear lighting for the hob area.
- **Intensive speed setting:** removes strong kitchen odours quickly and effectively.

Technical Data

Typology : Wall-mounted
 Approval certificates : CE, E17D UKCA marking, VDE
 Length of electrical supply cord : 130 cm
 Height of product, without chimney : 323 mm
 Minimum distance above an electric hob : 450 mm
 Minimum distance above a gas hob : 650 mm
 Net weight : 21.441 kg
 Type of control : Electronic
 Maximum output air extraction : 416 m³/h
 Boost position output recirculating : 469 m³/h
 Maximum output recirculating air : 367 m³/h
 Boost position air extraction : 700 m³/h
 Number of lights (Stck) : 2
 Noise level : 58 dB(A) re 1 pW
 Diameter of air outlet : 120 / 150 mm
 Grease filter material : Washable aluminium
 EAN code : 4242005172733
 Connection rating : 263 W
 Fuse protection : 10 A
 Voltage : 220-240 V
 Frequency : 60; 50 Hz
 Plug type : GB plug
 Installation type : Wall-mounted

Optional accessories

DWZ0AK0R0 : Long Life recirculation kit (chimless)
 DWZ0AK0S0 : Long Life recirculation kit
 DWZ0AX5K0 : Chimney extension 1000 mm
 DWZ0AX5L0 : Chimney extension 1500 mm
 DWZ1AK1I6 : Clean Air Plus recirculation kit
 DWZ1AK1V6 : Clean Air Plus recirc. kit (chimless)
 DWZ1AX5C6 : Clean Air Plus recirc. kit external
 DWZ1AX6E1 : Chimney standard black
 DZZ1XX1B6 : Clean Air Plus odor filter (replacement)



4 242005 172733

Serie | 4, Wall-mounted cooker hood, 80 cm, clear glass black printed DWK87CM60B

Angled hood: perfect for keeping an eye on your pots and pans.

Key performance features:

- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 416 m³/h
Intensive 700 m³/h
- Noise max. Normal Level: Noise, max. speed in normal us: 58 dB dB*

Special features

- TouchControl with Electronic display
- 3 power levels & intensive setting
- 2 x 1.5W LED light
- Colour Temperature: 3500 K
- Automatic intensive revert (6mins)
- 2 removable metal grease filter cassettes
- easy to clean Inner frame
- Installation: wall
- Rim ventilation

Design

- Chimney extractor hood
- TouchControl
- Electronic control

Performance/technical information

- Suitable for ducted or recirculating operation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- In recirculation operation chimless use possible
- Installation system: Wall fixing inclined/flat/cube
- Extraction rate according to EN 61591 max. 700 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 58 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
Max. normal use: 58 dB(A) re 1 pW
Intensive: 67 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 58 dB (A) re 1pW
- Power rating: 263 W
- Light Intensity: 90 lux
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 928-1198 x 790 x 499 mm
- Dimensions recirculating (HxWxD): 988-1258 x 790 x 499 mm
- Dimensions recirculating with CleanAir module (HxWxD):
1118 x 790 x 499 mm - mounting with outer chimney
1188-1458 x 790 x 499 mm - mounting with telescopic chimney
- Blower Efficiency Class: B*
- Lighting Efficiency Class: B*
- Grease Filtering Efficiency Class: C*
- Average Energy Consumption: 56.6 kWh/year*


Optional accessories

- Recirculating kit DWZOAK0R0

* In accordance with the EU-Regulation No 65/2014


Serie | 4, Wall-mounted cooker hood, 80 cm, clear glass black printed DWK87CM60B

Measurements in mm

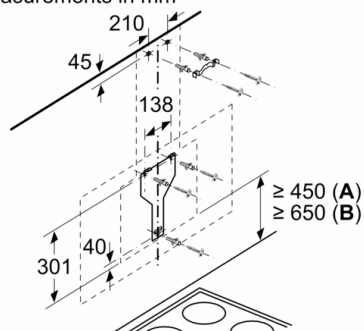


From upper edge of pan support

A: Electric
B: Gas

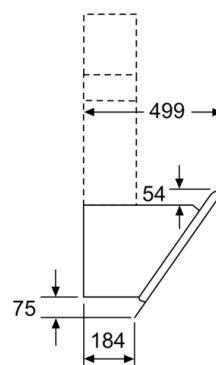


measurements in mm

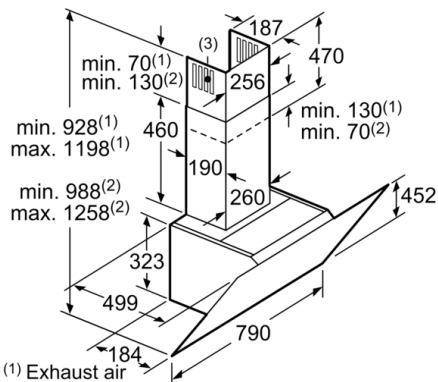


(1) Exhaust air
(2) Circulated air
(3) Air outlet – slot for exhaust air to be mounted facing down

measurements in mm

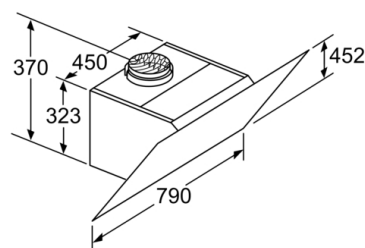

Appliance in circulated air mode
without duct
Circulated air set required

measurements in mm

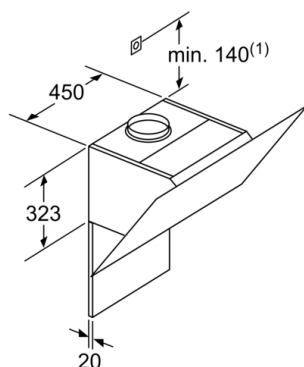

(1) Position
of socket

Note the maximum
thickness of the back panel.

measurements in mm

Measurements in mm

