

N 50, Ceiling cooker hood, 90 cm, Stainless steel
I95CAP6N1B



COOKING PASSION SINCE 1877



B



Specially designed motor housing for installations in between UK ceiling joists, which can save creating a bulk-head.

- ✓ Dimmer Function – dim the LED light conveniently with the button on the remote control
- ✓ Remote Control – comfortably control the ceiling hood with a remote
- ✓ Intensive speed setting: increases the extraction rate when the steam gets intense
- ✓ Interval Ventilation – automatically ventilates every hour for crisp, clean air
- ✓ Automatic After-running – ventilation continues for several minutes after you turn it off

Features

Technical Data

Typology : Island/Ceiling
Approval certificates : NEMKO
Length of electrical supply cord : 130 cm
Required niche size for installation (HxWxD) : 195mm x 410.0mm x 410mm mm
Height of product, without chimney : 60 mm
Minimum distance above an electric hob : 650 mm
Minimum distance above a gas hob : 900 mm
Net weight : 15.650 kg
Type of control : Electronic
Maximum output air extraction : 400 m³/h
Boost position output recirculating : 588.0 m³/h
Maximum output recirculating air : 423 m³/h
Boost position air extraction : 690 m³/h
Number of lights (Stck) : 4
Noise level : 65 dB(A) re 1 pW
Diameter of air outlet : 150 mm
Grease filter material : Washable aluminium
EAN code : 4242004246442
Connection rating : 284 W
Fuse protection : KSA A
Voltage : 220-240 V
Frequency : 50 Hz
Plug type : GB plug
Installation type : Island

Optional accessories

Z52JXC1N1 Clean Air Standard recirc. kit ext. inox
Z52JXC1W1 Clean Air Stand. recirc. kit ext. white



4 242004 246442

N 50, Ceiling cooker hood, 90 cm, Stainless steel
I95CAP6N1B



COOKING PASSION SINCE 1877

Features

Key performance features:

- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 Ø 15 cm:
max. Normal use 400 m³/h
Intensive 690 m³/h
- Noise max. Normal Level: Noise, max. speed in normal us: 65 dB dB*

Features

- 3 speeds plus intensive
- Automatic intensive revert (4 mins)
- softLight with dimmer function
- Interval operation
- Automatic after running (Automatic after running (10 minutes))
- Infrared remote control
- 2 metal grease filter cassettes
- Saturation indicator for metal and charcoal filter
- easy to clean Inner frame

Design

- Electronic controls
- LED display
- Rim ventilation
- metal grease filter
- Installation: Ceiling


Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction CleanAir recirculating kit (accessory) needed
- Max. extraction rate: 690 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 65 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
Max. normal use: 65 dB(A) re 1 pW
Intensive: 73 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 65 dB (A) re 1pW
- With the Clean Air Standard recirculation kit (available as optional accessory) your appliances reaches:
Extraction rate in recirculation mode:
Max. normal use: 423 m³/h
Intensive: 588 m³/h
Noise level in recirculation mode with Clean Air Standard odor filter :
Max. normal use: 69 dB(A) re 1 pW
Intensive: 74 dB(A) re 1 pW
- Power rating: 284 W
- Light Intensity: 366 lux
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 150 mm enclosed)
- Dimensions exhaust air (HxWxD): 193-193 x 900 x 440 mm
- Blower Efficiency Class: B*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: C*
- Average Energy Consumption: 62.6 kWh/year*

* In accordance with the EU-Regulation No 65/2014


Dimensioned drawings

measurements in mm

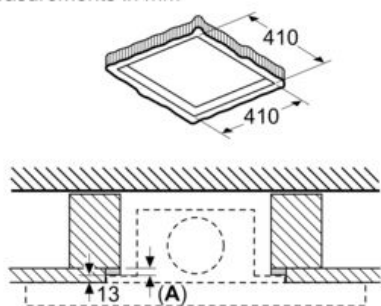


A: If required, even out the ceiling thickness to 13 mm using wooden spacers.

measurements in mm

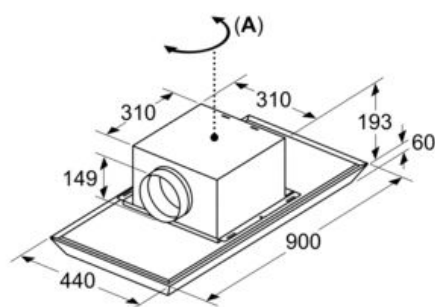


A: The fan outlet can be turned in all four directions

measurements in mm
Circulated air

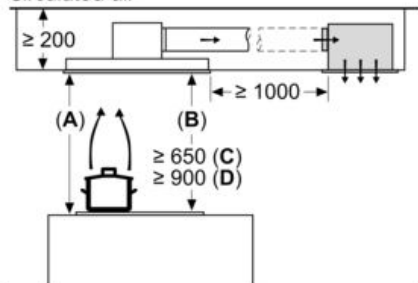

A: Optimum performance 700-1500
B: From upper edge of pan support
C: Electric
D: Gas

measurements in mm
Exhaust air

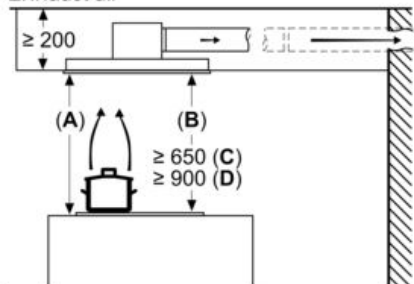

A: Optimum performance 700-1500
B: From upper edge of pan support
C: Electric
D: Gas