


N 70, Gas hob, 75 cm, Tempered glass
T27CA59S0



COOKING PASSION SINCE 1877

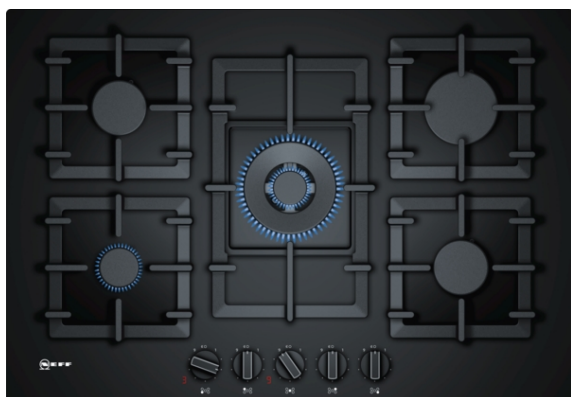

Optional accessories

Z2471X0 Wok ring

The gas hob with a tempered glass surface and adjustable FlameSelect.

- ✓ Tempered Glass Surface - extremely easy-to-clean surface.
- ✓ FlameSelect® – Gain ultimate control of your flame.
- ✓ 7-Segment Display with Residual Heat Indicator - a digital display showing the remaining heat.
- ✓ Pan Supports - continuous cast-iron pan supports for maximum stability and cooking convenience.
- ✓ Wok Burner - powerful cooking at up to 4 kW.

Features

Technical Data

Product name/family : gas hob w integrated controls

Construction type : Built-in

Energy input : Gas

Total number of positions that can be used at the same time : 5

Type of control setting devices : sword knobs

Required niche size for installation (HxWxD) : 45 x 560-562 x 480-492 mm

Width of the appliance : 752 mm

Dimensions : 45 x 752 x 520 mm

Dimensions of the packed product (HxWxD) : 145 x 793 x 597 mm

Net weight : 19.835 kg

Gross weight : 21.3 kg

Residual heat indicator : Separate

Location of control panel : Hob front

Basic surface material : Tempered glass

Color of surface : Black

Color of frame : Black

Approval certificates : CE

Length of electrical supply cord : 100 cm

EAN code : 4242004183167

Electrical connection rating : 2 W

Gas connection rating : 11500 W

Fuse protection : 3 A

Voltage : 220-240 V

Frequency : 50; 60 Hz



4 242004 183167

N 70, Gas hob, 75 cm, Tempered glass
T27CA59S0



COOKING PASSION SINCE 1877

Features

Design

- tempered glass surface, black
- Two built-in options:
 - Flush installation
 - Surface mounted installation: install the hob either flush or slightly raised on the worktop
- Cast iron pan supports with rubber feet

Usage convenience

- FlameSelect with 9 steps: precisely control and adjust the flame in nine defined levels.
- LED display for each zone: see the selected power level and the residual heat.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 5 burner hob
- Left front: Economy burner up to 1 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Center front: Wok burner up to 4 KW (depending on gas type)
- Right rear: High speed burner up to 3 KW (depending on gas type)
- Right front: Standard burner up to 1.75 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.
- 1 stage: indicates which burner parts and pan supports are still hot.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
NG H/E 20mbar, E+ 20/25mbar
Natural gas H 25 mbar (HU)
Natural gas L 25 mbar (NL)
Liquid gas G30,31 28-30/37mbar
Liquid gas G30 37 mbar (PL)
Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 58 x 752 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 11.5 KW

N 70, Gas hob, 75 cm, Tempered glass
T27CA59S0

Dimensioned drawings

