



N 90, Induction hob, 90 cm, Black  
T59TS5RNO



COOKING PASSION SINCE 1877

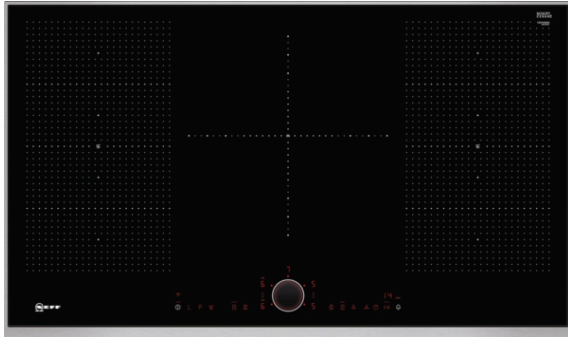

#### FlexInduction Hob with TwistPad control.

- ✓ TwistPadFire® – our removable, magnetic, illuminated control dial that gives you precise control over all cooking zones.
- ✓ Flex Induction – Your hob detects and heats your individual cookware.
- ✓ Power Move – Just slide your cookware to adjust the temperature.
- ✓ Home Connect – Send cooking settings to your smart hob.
- ✓ Frying Sensor – Monitors the temperature to prevent scorching.

#### Features

##### Technical Data

Product name/family : Cooking zone ceramic  
Construction type : Built-in  
Energy input : Electric  
Total number of positions that can be used at the same time : 5  
Required niche size for installation (HxWxD) : 51 x 880-880 x 490-500 mm  
Width of the appliance : 918 mm  
Dimensions : 51 x 918 x 546 mm  
Dimensions of the packed product (HxWxD) : 126 x 1073 x 603 mm  
Net weight : 24.463 kg  
Gross weight : 26.2 kg  
Residual heat indicator : Separate  
Location of control panel : Hob front  
Basic surface material : Ceramic  
Color of surface : Black, Stainless steel  
Color of frame : Stainless steel  
Approval certificates : AENOR, CE  
Length of electrical supply cord : 110 cm  
EAN code : 4242004209560  
Electrical connection rating : 11100 W  
Voltage : 220-240 V  
Frequency : 50; 60 Hz

#### Optional accessories

Z9410X1	Stainless Steel roaster with glas lid
Z9415X1	Steaming Rack for Stainless Steel roaste
Z9416X2	Griddle Plate
Z9417X2	Teppan Yaki (large)
Z943SE0	Set of 2 pots and 1 pan
Z9914X0	Connecting strip



4 242004 209560

## Features

### Design

- Ceramic glass on stainless steel trim
- 90 cm: space for 5 pots or pans.

### Flexibility of cooking zones

- 2 Flex zones: use cookware of any shape or size anywhere within the 40cm long zone.
- Ring zone triple: use regular up to extra large cookware (e.g. paella pans) on the expandable cooking zone.
- Cooking zone front left: 230 mm, 200 mm, 2.2 KW (max. power 3.7 KW)
- Cooking zone rear left: 230 mm, 200 mm, 2.2 KW (max. power 3.7 KW)
- Cooking zone middle: 210 mm, 260 mm, 320 mm, 3.3 KW (max. power 3.7 KW)
- Cooking zone rear right: 200 mm, 230 mm, 2.2 KW (max power 3.7 KW)
- Cooking zone front right: 230 mm, 200 mm, 2.2 KW (max. power 3.7 KW)

### Usage convenience

- TwistPad® Fire: directly control the power with the illuminated and removable magnetic dial.
- Variable 17-stage power settings for each zone: precisely adapt the heat with 17 power levels (9 main levels and 8 intermediate levels).
- Keep warm function: keep dishes warm at preset low power level.
- Timer with automatic shut off for all zones : switches off the cooking zone at the end of the time set (e.g. for boiled eggs).
- LED timer for each zone with switch off function and acoustic signal : an alarm sounds at the end of the time set (e.g. for pasta).
- Count up timer : shows how much time has passed since starting the timer (e.g. for potatoes).

### Time saving & efficiency

- Power Boost function for all zones : boil water faster thanks to 50% more energy than at the highest standard level.
- PanBoost: heat up pans faster than at the highest standard level while protecting the pan coating.
- PowerMove with 3 levels: increase or decrease the power level simply by moving the pot forwards or backwards.
- QuickStart function: when switching on, the hob automatically selects the cooking zone with cookware (when placed on a zone whilst the hob is off).
- ReStart function: in case of unintentional switch-off, this feature restores all previous settings by switching on the hob again within 4 seconds.

### Cooking assistance

- 5 frying levels: prevents overcooking with the automatic temperature regulation of the integrated sensor.
- Dish assistant: easily find the right temperature setting for a certain dish via the home connect app.

### Connectivity

- Home Connect with Remote Monitoring: check if the hob is switched off even when not at home, and find recipes or additional functions in the Home Connect app.
- Hob Hood Control - hood control (with Wi-Fi enabled hood): automatically activates the hood when cooking, thanks to the Wi-Fi connection of hob and suitable hood.

### Safety

- 2 stage residual heat indicators: indicates which cooking zones are still hot or warm.
- Control panel lock: prevent unintended activation of the hob.
- Control panel suspension: wipe overboiled liquids without unintentionally changing settings (blocking all touch buttons for 30 seconds).
- Main switch: switch off all cooking zones at the touch of a button.
- Safety cut out facility: for safety reasons, heating stops after a preset time if not used (possible to customise).
- Energy consumption display: shows the electricity consumption of the last cooking process.

### Installation


- Dimensions of the product (HxWxD mm): 51 x 918 x 546
- Required niche size for installation (HxWxD mm) : 51 x 880 x (490 - 500)
- Min. worktop thickness: 16 mm
- Connected load: 11.1 KW
- 4.6kW power output (20A); current management options for 16A, 13A or 10A connection: limit the maximum power if needed (depends on fuse protection of electric installation).
- Power cord: 1.1 m, Cable included in packaging

N 90, Induction hob, 90 cm, Black  
T59TS5RN0




COOKING PASSION SINCE 1877

Dimensioned drawings

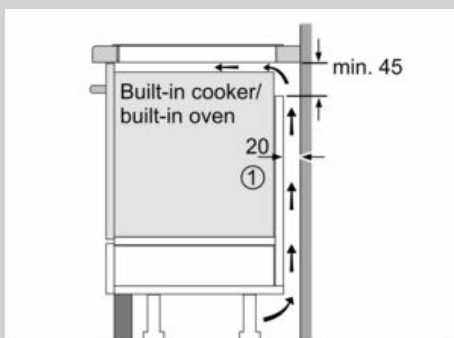


① Ventilation gap must be present

All measurements in mm

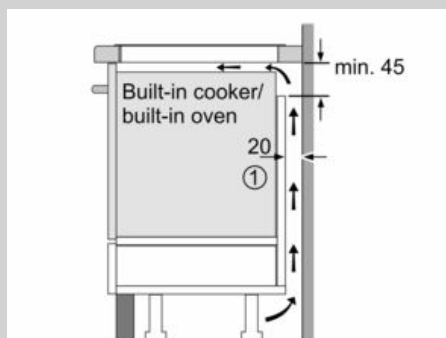


① Ventilation gap must be present

All measurements in mm

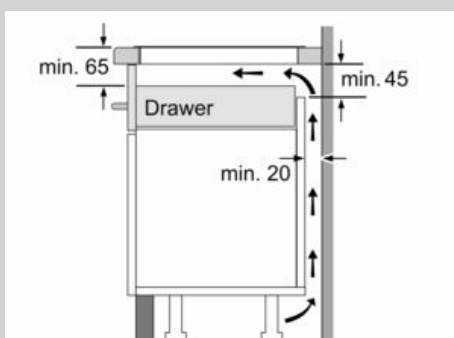

Measurements in mm

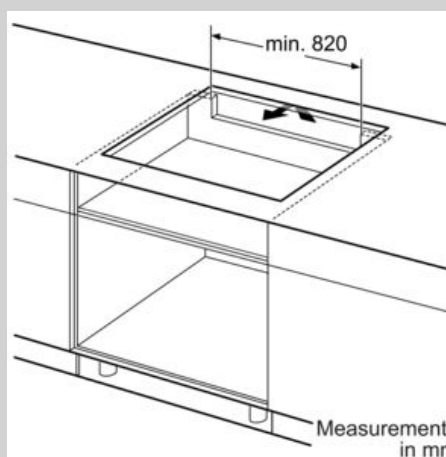

Measurements in mm

