

N 70, Telescopic cooker hood, 90 cm, Stainless steel  
D49ML54N1B



COOKING PASSION SINCE 1877



B



Telescopic hood: designed to provide powerful extraction without impacting on your kitchen space or design. These hoods pull out from underneath a cabinet when required for a streamlined kitchen.

- ✓ Efficient Drive Motor – Quiet and energy-efficient hood motor for a calmer kitchen.
- ✓ Intensive speed setting: increases the extraction rate when the steam gets intense
- ✓ Dimmer Function – easily dim the light according to your mood with the touch of a button
- ✓ Interval Ventilation – automatically ventilates every hour for crisp, clean air
- ✓ Automatic After-running – ventilation continues for several minutes after you turn it off

#### Features

##### Technical Data

Typology : Pull-out  
 Approval certificates : CE, E17D UKCA marking, VDE  
 Length of electrical supply cord : 175 cm  
 Required niche size for installation (HxWxD) : 385mm x 524.0mm x 290mm mm  
 Minimum distance above an electric hob : 430 mm  
 Minimum distance above a gas hob : 650 mm  
 Net weight : 14.077 kg  
 Type of control : Electronic  
 Number of speed settings : 3-stage + 2 intensive  
 Maximum output air extraction : 395 m<sup>3</sup>/h  
 Boost position output recirculating : 641 m<sup>3</sup>/h  
 Maximum output recirculating air : 358 m<sup>3</sup>/h  
 Boost position air extraction : 700 m<sup>3</sup>/h  
 Number of lights (Stck) : 3  
 Noise level : 53 dB(A) re 1 pW  
 Diameter of air outlet : 120 / 150 mm  
 Grease filter material : Washable stainless steel  
 EAN code : 4242004251194  
 Connection rating : 146 W  
 Fuse protection : 10 A  
 Voltage : 220-240 V  
 Frequency : 50; 60 Hz  
 Plug type : GB plug  
 Installation type : Built-in

#### Optional accessories

Z51ITD1X1	Long Life recirculation kit external
Z51IXB1X6	Clean Air Plus odor filter (replacement)
Z51IXC1X6	Clean Air Plus recirc. kit external
Z54TC02X0	Standard odor filter (replacement)
Z54TL90X1	Lowering frame
Z54TM90X0	Installation kit for 90cm wide wall unit
Z54TS02X0	Standard recirculation kit



4 242004 251194

N 70, Telescopic cooker hood, 90 cm, Stainless steel  
D49ML54N1B



COOKING PASSION SINCE 1877

## Features

### Features

- Soft touch control with 7 segment LED display
- 3 power levels and 2 intensive settings
- SoftLight with dimmer function
- 3 x 1,5W LED
- Efficient BLDC technology
- Noise reduction function
- Interval operation
- Automatic intensive revert (6mins)
- Automatic after running (Automatic after running (10 minutes))
- 3 metal grease filter cassettes
- Saturation indicator for grease filter

### Design

- 90 cm wide
- Stainless steel
- Handle strip specification: stainless steel with logo
- Steel filter cover

### Performance

- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Extraction rate according to EN 61591 ø 15 cm:  
max. Normal use 395 m<sup>3</sup>/h  
Intensive 700 m<sup>3</sup>/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 53 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:  
Max. normal use: 53 dB(A) re 1 pW  
Intensive: 69 dB(A) re 1 pW
- With the Clean Air Plus recirculation kit (available as optional accessory) your appliances reaches:  
Extraction rate in recirculation mode:  
Max. normal use: 358 m<sup>3</sup>/h  
Intensive: 641 m<sup>3</sup>/h  
Noise level in recirculation mode:  
Max. normal use: 60 dB(A) re 1 pW  
Intensive: 71 dB(A) re 1 pW
- Colour Temperature: 3500 K
- Light Intensity: 355 lux
- Power rating: 146 W
- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Average Energy Consumption: 38.8 kWh/year\*
- Blower Efficiency Class: B\*
- Lighting Efficiency Class: A\*
- Grease Filtering Efficiency Class: B\*





### Planning and installation information

- Installation system: Telescopic comfort installat.
- Dimensions (HxWxD): 426 x 898 x 290 mm
- Built-in dimensions (HxWxD): 385 x 524 x 290 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Electrical cable length 1.75 m



\* In accordance with the EU-Regulation No 65/2014

N 70, Telescopic cooker hood, 90 cm, Stainless steel  
D49ML54N1B

Dimensioned drawings

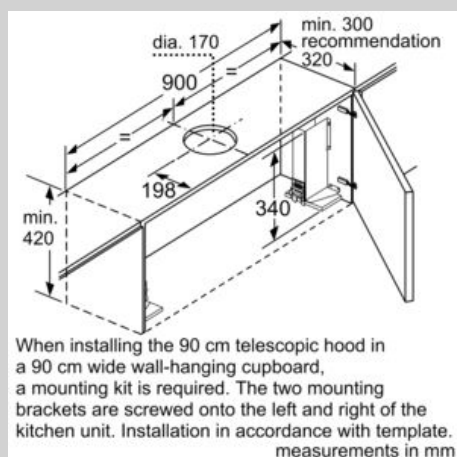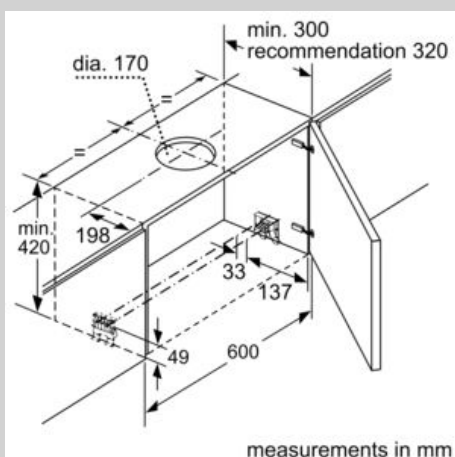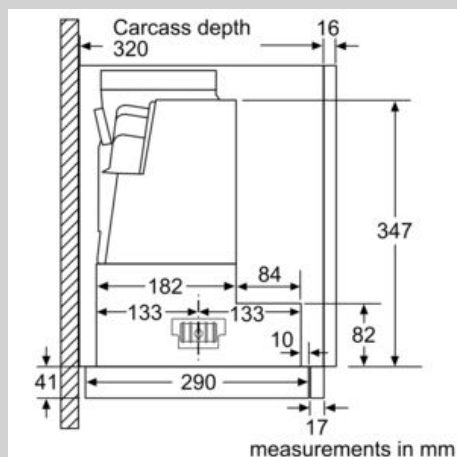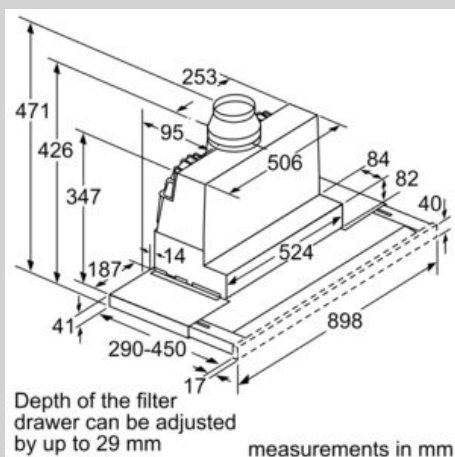

When installing the 90 cm telescopic hood in a 90 cm wide wall-hanging cupboard, a mounting kit is required. The two mounting brackets are screwed onto the left and right of the kitchen unit. Installation in accordance with template.

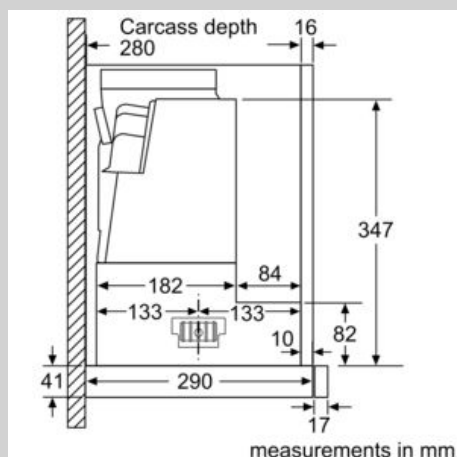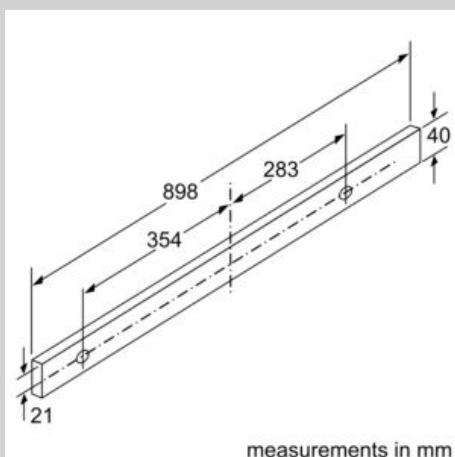

N 70, Telescopic cooker hood, 90 cm, Stainless steel  
D49ML54N1B

## Dimensioned drawings

